



Series SI9500 glass handrail system is designed for residential and commercial applications. The dry glazed mounting shoe provides a cleaner, simpler installation (as compared to wet set railing systems) that delivers excellent performance, long term serviceability, and adjustability.


Features:

- Dry glazed mounting shoe
- Concrete or steel substrate integration
- Hand Rail (34" - 38"), Guard Rail (42" or taller)
- Additional substrates may be accommodated dependent upon engineering
- Accommodates monolithic and laminated glazing infills from 1/2" to 3/4"
- Class I Anodized: Dark Bronze, Clear
- Will meet established structural requirements when properly installed
- Combination of stock components can accommodate various job site conditions
- LEED friendly system including recycled content
- Designed and manufactured in the U.S.A.

Options:

- Wood handle options and shapes
- Metal handle options and shapes
- Wood profile top cap available
- Aluminum profile top cap available
- Custom cladding finishes
 - Powder coat finish: AAMA 2604-2605
 - Fluoropolymer (50% or 70%): AAMA 2604-2605
 - Veneer & cladding options
- Segmented radius and irregular configurations
- Round or Straight End Caps
- Designed to accommodate almost any monolithic, insulated, laminated, decorative, polycarbonate, or solid panel infill
- One or two side adjustable design



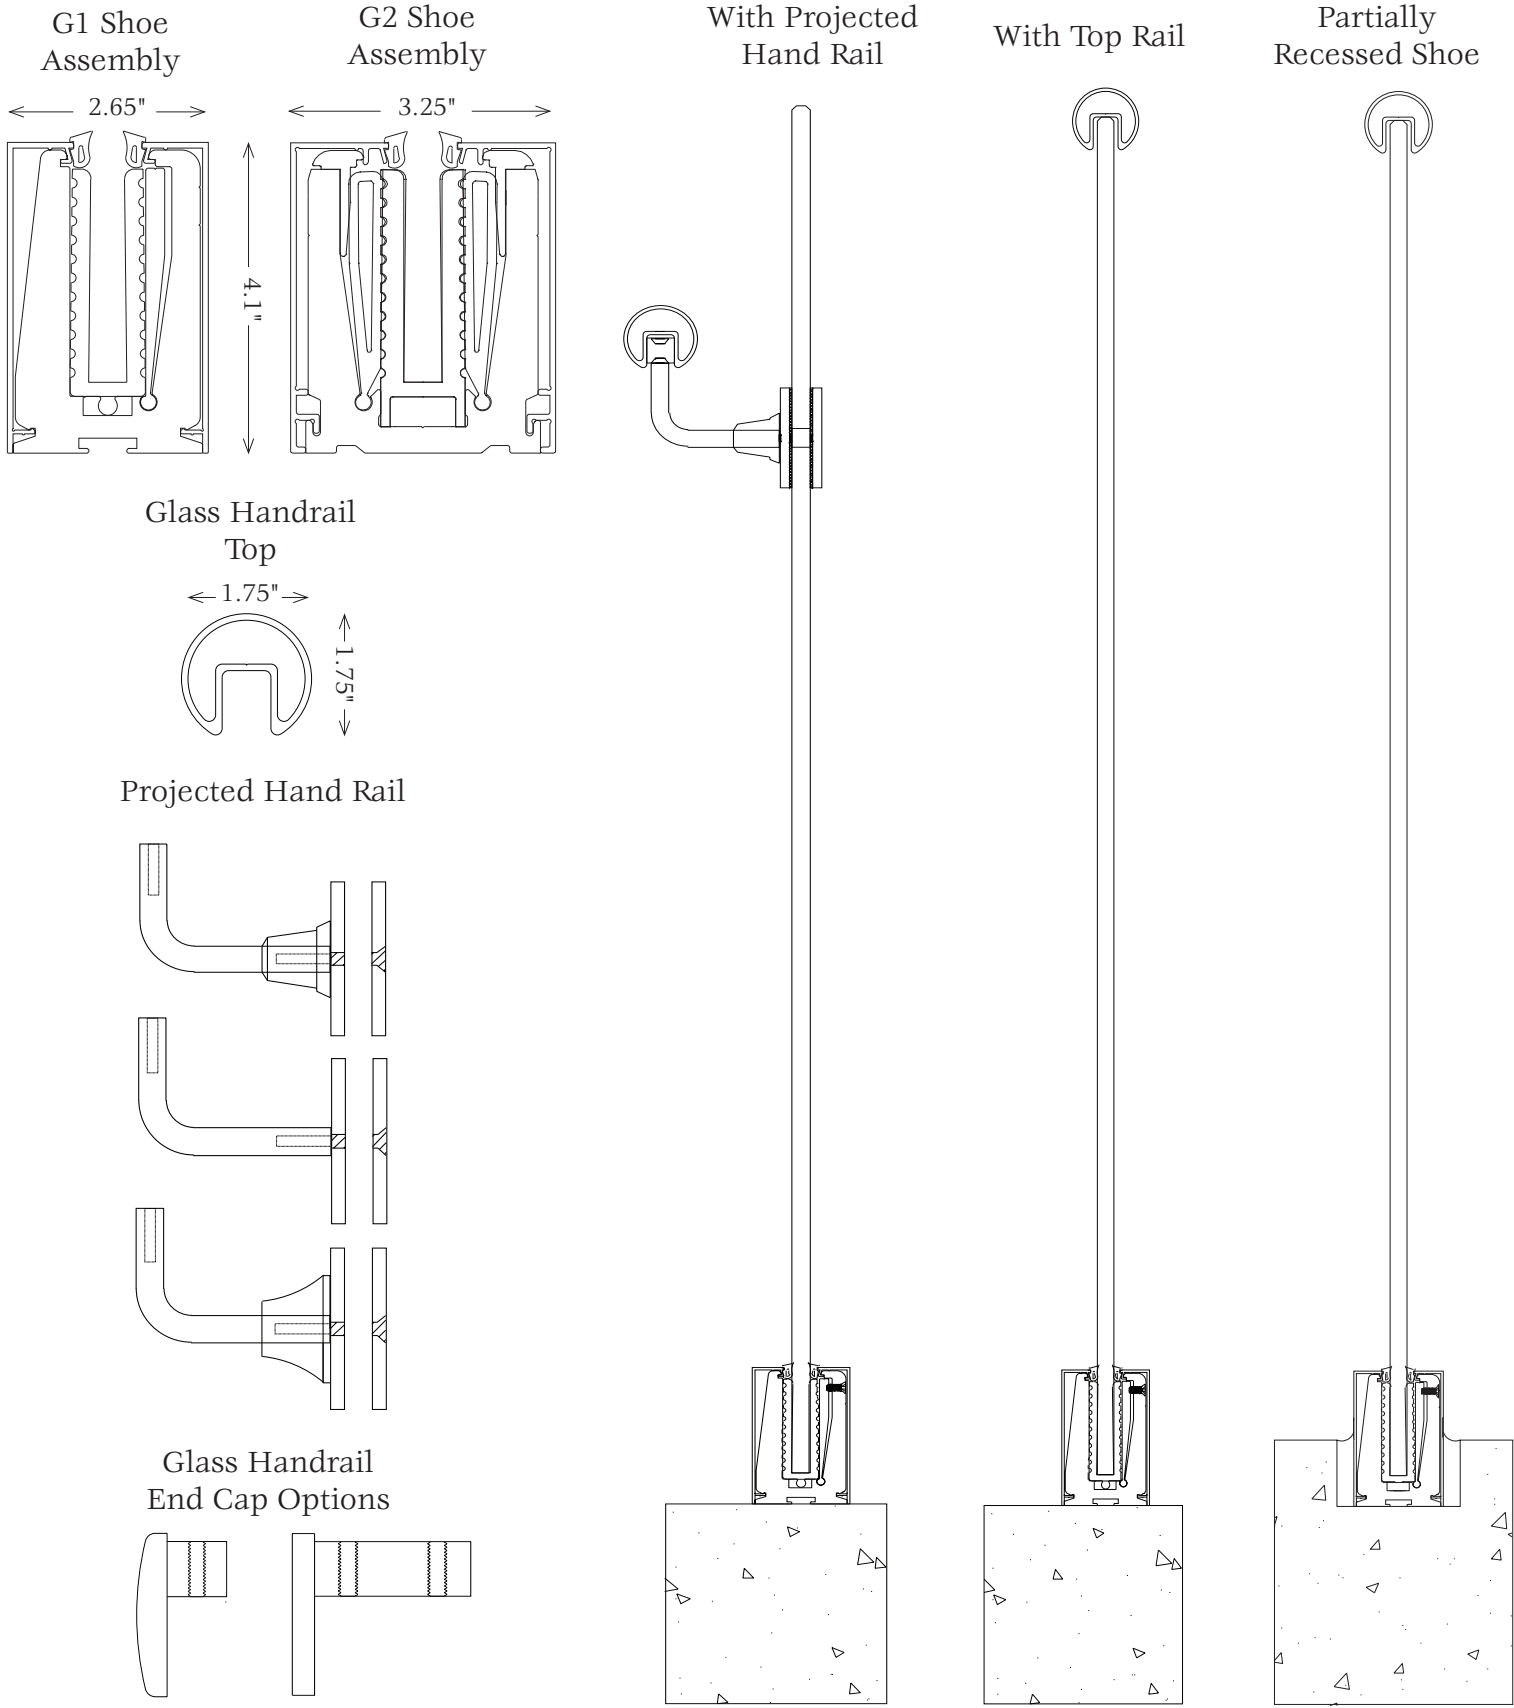

Please be sure to visit our website for additional product information.
www.solarinnovations.com

